

Masterfil® FE1121F Filters


Installation & Cleaning

Masterfil® filters are reusable fabric filters designed for easier operations, engineered to extend oil life and improve food quality by removing particles as small as 1/2 micron. Simply scrape debris out each day and replace filter after 7 days.

Installation

1. Ensure filter pan is clean and completely dry before installation.
2. Slide Masterfil® envelope filter onto insert screen aligning the hole over the threaded stud.
3. Fold down filter and secure folded end with clip.
4. Screw compression cap onto filter assembly threaded stud until snug.

**Equipment may look different based on your model*

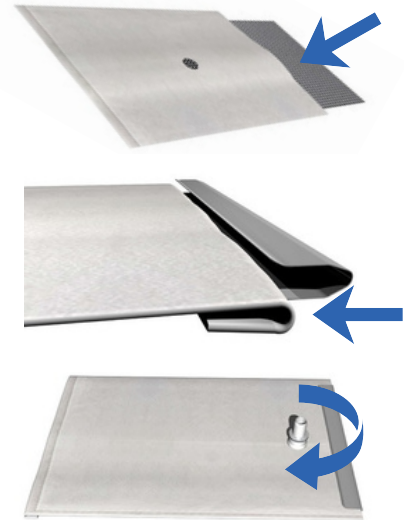

Daily Cleaning

Use the MasterScoop® and scrape filter at a 90 degree angle, scraping debris to one side and dispose. Ensure the bottom side of the filter is also scraped.



Scan to Watch
Installation &
Cleaning Video



Important Reminders

Scrape Filter
Twice per Day



Do **NOT** Get
Filter Wet



Change Filter
After 7 Days



To Reorder Filters: SKU FE1121F

✉ OrderDesk@OilSolutionsGroup.com

☎ 888.459.2112

Follow us on

