Frymaster

Oil Solutions Group
Oil Management Experts

Masterfil® FE2332X Filters
Installation & Cleaning

Masterfil® filters are reusable fabric filters designed for easier operations, engineered to extend oil life and improve food quality by removing particles as small as 1/2 micron. Simply scrape debris out each day and replace filter after 7 days.

Installation

1. Ensure filter pan is clean and completely dry before installation.
2. Slide Masterfil® envelope filter onto insert screen aligning the hole over the threaded stud.
3. Fold down filter and secure folded end with clip.
4. Screw compression cap onto filter assembly threaded stud until snug.

**Equipment may look different based on your model*

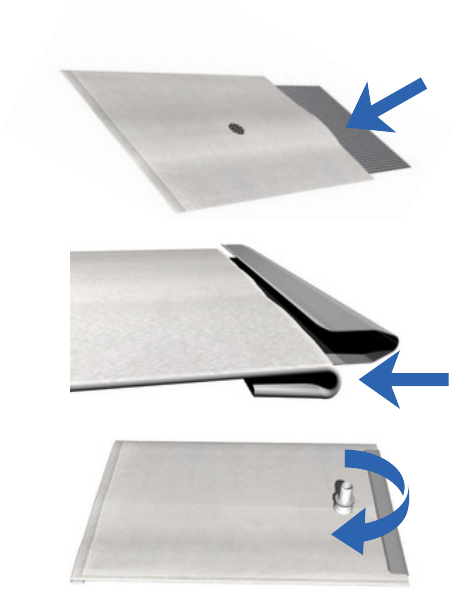

Daily Cleaning

Use the MasterScoop® and scrape filter at a 90 degree angle, scraping debris to one side and dispose. Ensure the bottom side of the filter is also scraped.

Scan to Watch Installation & Cleaning Video

Important Reminders

Scrape Filter Twice per Day

Do **NOT** Get Filter Wet

Change Filter After **7** Days

To Reorder Filters: SKU FE2332X

OrderDesk@OilSolutionsGroup.com

888.459.2112

Follow us on