


Masterfil® Flat Sheet Filter Installation & Cleaning

Masterfil® filters are reusable fabric filters designed for easier operations and engineered to extend oil life and improve food quality by removing particles as small as ½ micron. Simply scrape debris out each day and replace filter after 7 days.

Installation

Ensure the filter pan and screen are completely dry

1. Place screen in filter pan
2. Lay Masterfil® filter on top of metal screen
3. Place hold down ring on top of Masterfil® filter

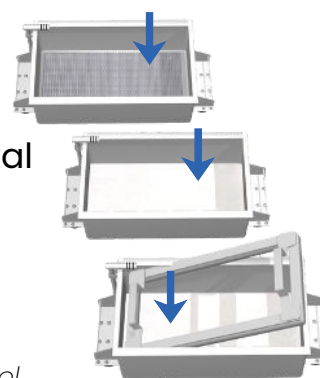

**Equipment may look different based on your model*

Daily Cleaning

Use MasterScoop® and scrape filter at a 90° degree angle, scraping debris to one side and dispose.

⚠ WARNING Never lift or remove the hold-down ring during daily scraping. Keep the ring seated to stop crumbs from bypassing.



**Scan to Watch
Installation &
Cleaning Video**



Important Reminders

Scrape Filter
Twice per Day



Do NOT Get
Filter Wet



Change Filter
After 7 Days



To Reorder Filters

 OrderDesk@OilSolutionsGroup.com

 888.459.2112

MADE IN
THE USA



Follow us on

